


Overview

The HP 332T is a dual-port, low-cost, low profile 1Gb adapter featuring the BCM5720 Broadcom single-chip solution in a PCIe 2.0 compliant form factor designed for select HP ProLiant Gen8 and Gen7 ML/DL/SL servers.

It delivers full line-rate performance across all ports with low power consumption, providing Ethernet connectivity ideal for virtualization, security, server consolidation, and network segmentation.

Supported advanced features include Large Send and Receive offload capability, TCP checksum and segmentation, VLAN tagging, MSI-X, jumbo frames, IEEE 1588 (Precision Time Protocol - PTP), and virtualization features such as VMware NetQueue and Microsoft Virtual Machine Queue (VMQ).

Support for HP Sea of Sensors 3D Technology enhances server performance while reducing energy use and expense.

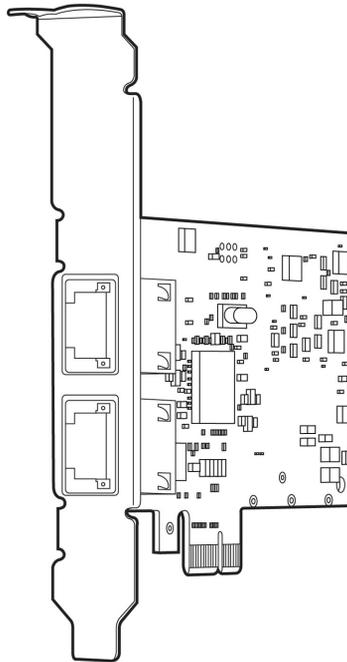

Models

HP Ethernet 1Gb 2-port 332T Adapter

615732-B21

Kit Contents

- HP Ethernet 1Gb 2-port 332T Adapter
- Low profile bracket
- Quick install card
- Product warranty statement

Compatibility

Servers

ProLiant DL (rack-optimized):

- HP ProLiant DL160 Gen8
- HP ProLiant DL165 G7
- HP ProLiant DL320e Gen8
- HP ProLiant DL320e Gen8 v2
- HP ProLiant DL360e Gen8
- HP ProLiant DL360p Gen8
- HP ProLiant DL380e Gen8
- HP ProLiant DL380p Gen8
- HP ProLiant DL385p Gen8
- HP ProLiant DL560 Gen8
- HP ProLiant DL580 G7
- HP ProLiant DL585 G7
- HP ProLiant DL980 G7

ProLiant ML (expansion-optimized):

- HP ProLiant ML310e Gen8
- HP ProLiant ML310e Gen8 v2
- HP ProLiant ML350e Gen8
- HP ProLiant ML350p Gen8

ProLiant SL (scalable line):

- HP ProLiant SL210t Gen8
- HP ProLiant SL230s Gen8
- HP ProLiant SL250s Gen8

NOTE: This is a list of supported servers. Some may be discontinued.

Standard Features

Product Features

- Industry-leading hardware integration for low power
- Dual-port, PCI Express 2.0 1Gb Ethernet adapter for HP ProLiant Generation 8 Rack and Tower servers and select HP ProLiant G7 Rack servers
- Dual-port 1GbE provide up to 4 Gb full duplex aggregate throughput per adapter
- Energy Efficient Ethernet (EEE) support
- Optimized for virtual servers
- Improved small packet performance
- Supports the Preboot eXecution Environment (PXE)
- IEEE 1588, IEEE 802.1as (hardware assisted)

Dual-port 1 Gigabit Ethernet Throughput

The HP 332T adapter provides 1,000 Mbps Ethernet transfer rate per port (4 Gbps aggregate full duplex) delivers outstanding network performance that improves response time and removes bottlenecks. The adapter is an ideal solution for server virtualization and security initiatives or where network segmentation is required. The total aggregate throughput of 4Gbps in full-duplex mode also meets the needs for customers desiring high bandwidth but are not yet ready to move to 10 Gigabit Ethernet.

NOTE: The port enumeration on the 332T is from the top down, i.e. the port near the top of the adapter is port #0 followed by port #1

Jumbo Frames

The HP 332T adapter supports jumbo frames (also known as extended frames), permitting up to a 9K byte (KB) transmission unit (MTU) when running Ethernet I/O traffic. This is over 5X the size of a standard 1500-byte Ethernet frame. With jumbo frames, networks can achieve higher throughput performance and greater CPU utilization. These attributes are particularly useful for database transfer and tape backup operations.

TCP/IP Stateless Offloading

For overall improved system response, the 332T supports standard TCP/IP offloading techniques including:

- TCP/IP and UDP checksum offload moves the TCP and IP checksum offloading from the CPU to the network adapter.
- Large send offload (LSO) or TCP segmentation offload (TSO) allows the TCP segmentation to be handled by the adapter rather than the CPU.

MSI and MSI-X

Up to 17 Message Signaled Interrupt (Extended) provides performance benefits for multi-core servers by load balancing interrupts between CPUs/cores.

The HP 332T Adapter by Broadcom supports MSI and MSI-X

802.1Q VLANs

IEEE 802.1Q virtual local area network (VLAN) protocol allows each physical port of the HP 332T adapter to be separated into multiple virtual NICs for added network segmentation and enhanced security and performance. VLANs increase security by isolating traffic between users. Limiting the broadcast traffic to within the same VLAN domain also improves performance.

Time synchronization

Hardware assist for IEEE 1588 and IEEE 802.1AS time synchronization implementations for time sensitive applications. The HP 332T Adapter by Broadcom supports Precision Time Protocol (PTP).

Standard Features

Optimized for Virtualization

I/O Virtualization support for VMware NetQueue and Microsoft VMQ help meet the performance demands of consolidated virtual workloads.

Network Adapter Teaming The HP 332T adapter support for NIC teaming helps IT administrators increase network fault tolerance and increased network bandwidth. The team of adapters can work together as a single virtual adapter. The HP 332T provides support for several different types of teaming enabling IT administrators to optimize availability, improve performance and help reduce costs

Versatility

10/100/1000T Twisted Pair Networks

In addition to Gigabit Ethernet, the 332T adapter supports both 10Mbps and 100Mbps providing compatibility with Ethernet and Fast Ethernet twisted pair networks.

Full and Half Height Brackets

The HP332T adapter ships with a pre-installed full height bracket and a half height bracket is also supplied to ensure trouble free installation. The included quick install card guides the user in the bracket exchange process.

x1/x4/x8/x16 PCI Express Compatibility

The x1 PCI Express interface on the HP 332T is compatible with x1, x4, x8, and x16 PCI slots. If installed in a x4, x8 or x16 slot, the adapter will operate at the x1 speed.

High Availability

Network Adapter Teaming ProLiant Network Adapter Teaming provides fault tolerance and load balancing across a team of two or more network adapters. The team of adapters works together as a single virtual adapter. The HP 332T provides support for several different types of teaming enabling IT administrators to optimize availability, improve performance and help reduce costs.

The teaming options offer IT professionals an easy, efficient, and cost-effective way to provide network fault tolerance and increased network bandwidth. For more information, refer to the ProLiant Network Adapter Teaming Whitepaper available at:

<http://bizsupport.austin.hp.com/bc/docs/support/SupportManual/c01415139/c01415139.pdf>

Network Management

Management Support

The HP 332T adapter can be administered from HP Systems Insight Manager (SIM). The adapters can be managed individually or in teams, providing SNMP based statistics for reporting purposes. The HP 332T adapter can also be managed by other applications with SNMP support.

Server Integration

The HP 332T adapter is a validated, tested, and qualified solution that is optimized for HP ProLiant servers. HP validates a wide variety of major operating systems drivers with the full suite of web-based enterprise management utilities including HP Intelligent Provisioning and HP Systems Insight Manager that simplify network management.

This approach provides a more robust and reliable networking solution than offerings from other vendors and provides users with a single point of contact for both their servers and their network adapters.

Standard Features

Configuration Utilities	Each HP 332T ships with a suite of operating system-tailored configuration utilities that allow the user to enable initial diagnostics and configure adapter teaming. This includes a patented teaming GUI for Microsoft Windows operating systems. Additionally, support for scripted installations of teams in a Microsoft Windows environment allow for unattended OS installations.
LED Indicators	The colored LEDs on each port of the HP 332T adapter indicate link status and link activity.
Preboot eXecution Environment (PXE)	PXE allows the server to boot over the network and download software residing in the network.
Energy Efficient Ethernet	Compliant with IEEE 802.3az, featuring advanced power savings features throttles power usage with network load activity.
Warranty	Maximum: The remaining warranty of the HP product in which it is installed (to a maximum three-year, limited warranty). Minimum: One year limited warranty. Additional information regarding worldwide limited warranty and technical support is available at: http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html

Service and Support

Service and Support

HP Technology Services

HP Technology Services offers you technical consultants and support expertise to solve your most complex infrastructure problems. We help keep your business running, boost availability, and avoid downtime.

Protect your business beyond warranty with HP Care Pack Services

When you buy HP Options, it's also a good time to think about what level of service you may need. HP Care Pack services provide total care and support expertise with committed response choices designed to meet your IT and business need.

HP Foundation Care services deliver scalable support-packages for HP industry-standard servers and software. You can choose the type and level of service that is most suitable for your business needs. New to this portfolio is HP Collaborative Support. If you are running business critical environments, HP offers Proactive Care or Critical Advantage. These services help you deliver high levels of application availability through proactive service management and advanced technical response.

Here is the support service recommendation from the Foundation Care and Proactive Care portfolio. For customized support service solution, HP can work with you to tailor a service solution for your unique support requirements using broader services portfolio of Foundation Care and Proactive Care.

Recommended HP Care Pack Services for optimal satisfaction with your HP product

Recommended Services

3-Year HP 24x7 4 hour Response, Proactive Care

Helps optimize your systems and delivers high levels of application availability through proactive service management and advanced technical response. A skilled Technical Manager will own your query or issue end to end until resolved, delivering a single point of contact for you

OR

3-Year HP 24x7 4 hour Response, HP Collaborative Support

Provides problem resolution support across the stack of HW, firmware, and HP and 3rd party SW. In case the issue is with 3rd party SW, HP does known issue resolution. If HP cannot solve the issue, it will contact the third-party vendor and create a problem incident on your behalf

<http://h20195.www2.hp.com/V2/GetPDF.aspx/4AA3-8232ENW.pdf>

HP Installation of ProLiant Add On Options Service

This easy-to-buy, easy-to-use HP Care Pack service helps ensure that your new HP hardware or software is installed smoothly, efficiently, and with minimal disruption of your IT and business operations

Service and Support

Related HP Care Pack Services to enhance your HP product experience

Related Services

3-Year HP 24x7 4 hour Response, Proactive Care

Helps optimize your systems and delivers high levels of application availability through proactive service management and advanced technical response. A skilled Technical Manager will own your query or issue end to end until resolved, delivering a single point of contact for you

OR

3-Year HP 24x7 4 hour Response, Hardware Support Onsite Service

Provides you with rapid remote support and if required an HP authorized representative who will arrive on site any time and day of the year to begin hardware maintenance service within 4 hours of the service request being logged

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5982-6547EEE.pdf>

3-Year HP 6-hour Onsite Call-to-Repair, HP Collaborative Support

Offers customers a single point of contact for server problem diagnosis, hardware problem resolution to return the hardware in operating condition within 6 hours of the initial service request to the HP Global Solution Center, and basic software problem diagnosis, fault isolation, and resolution if available to HP.

<http://h20195.www2.hp.com/V2/GetPDF.aspx/4AA3-8232ENW.pdf>

HP Proactive Select Service

Provides a flexible way to purchase HP best-in-class consultancy and technical services. You can buy Proactive Select Service Credits when you purchase your hardware and then use the credits over the next 12 months. <http://h20195.www2.hp.com/V2/GetPDF.aspx/4AA2-3842ENN.pdf>

Insight Remote Support

Provides 24 X 7 remote monitoring, proactive notifications, and problem resolution. Learn more

<http://www.hp.com/go/insightremotesupport>

HP Support Center

Personalized online support portal with access to information, tools and experts to support HP business products. Submit support cases online, chat with HP experts, access support resources or collaborate with peers. Learn more <http://www.hp.com/go/hpsc>

HP's Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HP Insight Remote Support and HP Support Center are available at no additional cost with a HP warranty, HP Care Pack or HP contractual support agreement.

*HP' Support Center Mobile App is subject to local availability

Parts and materials

HP will provide HP-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements. Supplies and consumable parts will not be provided as part of this service; standard warranty terms and conditions apply. Parts and components that have exceeded their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual or the technical product data sheet will not be provided, repaired or replaced as part of this service.

Service and Support

Warranty / Service Coverage

For ProLiant servers and storage systems, this service covers HP-branded hardware options qualified for the server, purchased at the same time or afterward, internal to the enclosure, as well as external monitors up to 22" and tower UPS products; these items will be covered at the same service level and for the same coverage period as the server unless the maximum supported lifetime and/or the maximum usage limitation has been exceeded. Coverage of the UPS battery is not included; standard warranty terms and conditions apply.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by HP due to malfunction. It does not apply to any exchange of Disk or SSD/Flash Drives that have not failed. SSD/Flash Drives that are specified by HP as consumable parts and/or that have exceeded maximum supported lifetime and/or the maximum usage limit as set forth in the manufacturer's operating manual or the technical data sheet are not eligible for the defective media retention service feature option.

For more information

To learn more on services for HP ESSN Options, please contact your HP sales representative or HP Authorized Channel Partner. Or visit: <http://www.hp.com/services/proliant> or www.hp.com/services/bladesystem

Related Options

Gigabit Server Adapters	HP NC112T PCI Express Gigabit Server Adapter	503746-B21
	HP NC360T PCI-E Dual Port Gigabit Server Adapter	412648-B21
	HP NC364T PCI-E Quad Port Gigabit Server Adapter	435508-B21
	HP NC365T 4-port Ethernet Server Adapter	593722-B21
	HP NC373F PCI-E Multifunction 1000SX Gigabit Svr Adapter	394793-B21
	HP NC373T PCI-E Multifunction Gigabit Server Adapter	394791-B21
	HP NC375T PCI Express Quad Port Gigabit Server Adapter	538696-B21
	HP NC382T PCI Express Dual Port Multifunction Gigabit Server Adapter	458492-B21
	HP Ethernet 1Gb 4-port 331T Adapter	647594-B21
HP Ethernet 1Gb 2-port 361T Adapter	652497-B21	

10 Gigabit Server Adapters

NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

HP NC522SFP Dual Port 10GbE Gigabit Server Adapter	468332-B21
HP NC523SFP 10Gb 2-port Server Adapter	593717-B21
HP NC524SFP Dual Port 10GbE Module	489892-B21
NOTE: NC524SFP is available only on DL370 G6, ML370 G6, DL580 G7, DL585 G7, and DL980 G7.	
HP NC550SFP Dual Port 10GbE Server Adapter	581201-B21
HP NC552SFP 10Gb 2-port Ethernet Server Adapter	614203-B21
HP Ethernet 10Gb 2-port 530SFP Adapter	652503-B21
HP Ethernet 10Gb 2-port 530T Adapter	656596-B21
HP Ethernet 10Gb 2-port 560SFP+ Adapter	665249-B21
HP Ethernet 10Gb 2-port 561T Adapter	716591-B21
HP Ethernet 10Gb 2-port 570SFP+ Adapter	718904-B21

FlexibleLOM Adapters

NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

Ethernet Adapters

HP Ethernet 1Gb 4-port 331FLR Adapter	629135-B21
HP Ethernet 1Gb 4-port 366FLR Adapter	665240-B21
HP Ethernet 10Gb 2-port 530FLR-SFP+ Adapter	647581-B21
HP Ethernet 10Gb 2-port 560FLR-SFP+ Adapter	665243-B21
HP Ethernet 10Gb 2-port 561FLR-T Adapter	700699-B21
HP Ethernet 10Gb 2-port 570FLR-SFP+ Adapter	717491-B21

FlexFabric Adapters

HP FlexFabric 10Gb 2-port 526FLR SFP+ Adapter	629138-B21
HP FlexFabric 10Gb 2-port 533FLR-T Adapter	700759-B21
HP FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter	700751-B21
HP FlexFabric 10Gb 2-port 554FLR-SFP+ Adapter	629142-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information: www.hp.com/go/ProLiantNICs

Technical Specifications

General Specifications	Network Processor	Broadcom NetXtreme BCM5720 chipset
	Data Rate	Two ports, each at 1 Gbps full duplex (2 Gbps aggregate per port); 4 Gbps aggregate full duplex theoretical bandwidth.
	Data Path	One lane (x1) PCI Express compatible with x1, x4, x8, and x16 PCI Express slots
	Bus Type	PCIe 2.0
	Bus Speed	Gen 2.0 x1
	Interrupt Levels	Automatically configured
	Connector	RJ-45 (Two)
	Cable Distance	Up to 328 ft (100 m)
	Wiring	Category 5/ (CAT-5) or better twisted-pair cabling
	Dimensions	11.18 cm x 5.59 cm [4.4 in x 2.2 in (L x W)] (without bracket)
	Form Factor	Low profile card with both full height (pre-installed) and half height brackets included in kit
	IEEE Compliance	802.3,802.3u,802.3ab,802.3x,802.3ad,802.1p, 802.1q, 802.3az, 1588, 802.1as

Power and Environmental Specifications	Operating	Temperature	32° to 131° F (0° to 55° C)
		Humidity	10% to 90% non-condensing
	Power		2.2 W (1000Base-T, both ports, maximum traffic) 2.1 W (1000Base-T, both ports, idle, without EEE link partner) 1.7 W (1000Base-T, both ports, idle, EEE link partner) 0.6 W (AUX power with WoL)
	Emissions		Class B
	Agency approvals	USA	FCC Part 15 Class B
		Canada	ICES---3, Issue 4
		Japan	VCCI V3 (2010.04) Class B
		Korea	KN22 ClassB, KN24
		Australia	EN55022:2006+A12007 class B
		European Union	EN55024:1998+A1:2011+A2; EN61000-3-2:2006, EN61000-3-3:2008
	International	EN55022:2006 + A1:2007 Class B	
Safety		6 of 6	
Other		UL Mark (USA and Canada) CE Mark EN 60590	

Technical Specifications

Operating System Support

Microsoft Windows Server 2008 (32/64), Enterprise, Web, Embedded, and R2
Microsoft Windows HPC Server 2008
Microsoft certified miniport and teaming drivers
Microsoft Windows 2008 Standard (32 and x64)
Microsoft Windows 2008 Enterprise (32 and x64)
Microsoft Windows Small Business Server 2011 (SBS V7) - base
Microsoft Windows Small Business Server 2011 Essentials
RHEL 5.7 x86 and AMD 64 & EM 64T
RHEL 6.1 x86 and AMD 64 & EM 64T
SLES10 x86 and AMD 64 & EM 64T
SLES 11x86 and AMD 64 & EM64T
Solaris 10
VMware 4.1u2 and 5.0u1
Citrix
Hyper-V (Windows 2008 32 and 64)

NOTE: For more Linux OS support & certification information, please visit our the ProLiant & BladeSystem Server Linux matrix: <http://h18004.www1.hp.com/products/servers/linux/hplinuxcert.html>

Environment-friendly Products and Approach

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: <http://www.hp.com/go/green>. To recycle your product, please go to: <http://www.hp.com/go/green> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

© Copyright 2013 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Windows is a US registered trademark of Microsoft Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.